



EFFER 130 M


TECHNICAL SPECIFICATION

EFFER 130 M

TECHNICAL DATA	130 M B-1	130 M B-2	130 M B-3	130 M E-4	130 M E-5
Max. lifting capacity (ft-lbs)	88 490	83 350	81 110	74 530	73 010
Outreach, hydraulic extensions (ft)	20' 8"	27' 7"	34' 9"	42' 0"	49' 6"
Outreach / lifting capacity (ft-lbs)	9' 2" - 9 480	9' 2" - 8 820	9' 10" - 8 160	7' 10" - 9 480	8' 2" - 8 820
	14' 1" - 6 170	14' 5" - 5 730	14' 9" - 5 510	15' 5" - 4 850	15' 9" - 4 630
	20' 0" - 4 410	20' 4" - 4 060	20' 8" - 3 790	21' 4" - 3 400	21' 8" - 3 130
	-	26' 11" - 3 090	27' 3" - 2 820	27' 7" - 2 470	27' 11" - 2 250
	-	-	33' 10" - 2 200	34' 5" - 1 900	34' 9" - 1 680
	-	-	-	41' 8" - 1 540	42' 0" - 1 320
-	-	-	-	49' 3" - 1 100	
Slewing angle (°)	415	415	415	415	415
Height in folded position (in)	88	88	88	89	89
Width in folded position (in)	93	96	98	98	99
Installation space needed (in)	41	40	40	40	40
Weight, "standard" crane without stabilizers (lbs)	2 910	3 150	3 420	4 100	4 300
Weight, stabilizer equipment (lbs)	540 - 850	540 - 850	540 - 850	540 - 850	540 - 850

Features

- M-Drive manual control system
- VSL: Variable Stability Limit (Optional)
- LSS-V: Load Stability System
- SAF: Semi Automatic Folding
- HiConnect
- nDurance™ nano technology coating
- 1 Year warranty - All inclusive
- 3 Year warranty - Structural

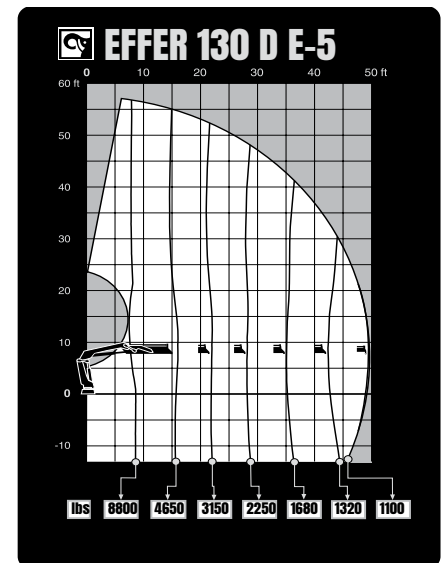

Hiab is a leading provider of smart and sustainable load handling solutions. We are committed to delivering the best customer experience every day with the most engaged people and partners. Hiab's premium equipment includes HIAB, EFFER and ARGOS loader cranes, MOFFETT and PRINCETON truck mounted forklifts, LOGLIFT forestry cranes, JONSERED recycling cranes, MULTILIFT skiploaders and hooklifts, GALFAB roll-off cable hoists, and tail lifts under the ZEPRO, DEL and WALTCO brands. As the industry pioneer, Hiab continues to make load handling smarter, safer and more sustainable to build a better tomorrow.



Hiab USA, Inc.
 12233 Williams Rd
 Perrysburg, 43551 OH USA
 tel. +419 482 6000

effer.com - hiab.com

EFFER is part of Hiab