

NO TIME-CONSUMING CONNECTING AND DISCONNECTION OF SHORT HOSES ANYMORE

NO RISKY CLIMBING UP AND DOWN THE TRUCK LOAD BED ANYMORE

NO LOSS OF TIME ANYMORE DUE TO MANUAL WORKS WHEN CHANGING ATTACHMENTS

SHORT HOSE CONNECTION ONLY BETWEEN QUICK CHANGE LOWER PART AND ATTACHMENT

FULLY HYDRAULIC CHANGE OF ATTACHMENT WITHIN ONLY A FEW SECONDS



SMARTFLOW
FASTER! EASIER! SAFER!



DIFFERENT LOWER PARTS FOR MECHANICALLY OR HYDRAULICALLY OPERATED ATTACHMENTS AVAILABLE!

Fully hydraulic Quick Change Device

KM 506 HD SMARTFLOW

The new fully hydraulic quick change device for loader crane attachments allows for a fast exchange of hydraulic or mechanical tools at the truck crane without any manual works at attachment or rotator.

- **Fast and easy!** No manual reconnection of the hoses necessary anymore when changing the attachment!
- **Lower part with or without hydraulics** available, depending on the use of a hydraulically or mechanically operated attachment.
- **Available for Kinshofer rotators** KM 04 S68-30US, KM 06 S68-35 and KM 06 S68-40.
- **Robust and compact construction** – short hose connection to the hydraulic attachment are connected directly to the lower part of the quick change device.
- **Weather protection cap** available to protect the quick change device lower part when not connected to the upper part.
- **Non-rotating load hook** also available.
- **Matching all crane attachments** with flange hole pattern □140mm.





Quick change device KM 506 HD

Type	Description	Hole pattern (mm)	Weight (kg)
KM 506 HD	complete incl. upper and lower part with hydraulic couplings	4x Ø17 / □140	45
KM 506 01 HD	upper part		19
KM 506 02 HD	lower part with couplings for hydraulic attachment	4x Ø17 / □140	26
KM 506 04 HD	lower part without couplings for mechanical attachment	4x Ø17 / □140	23
KM 506 03 HD	non-rotating load hook incl. mechanical lower part		
KM 506 05	weather protection cap		


Technical data

Operating pressure open-close (attachment)	37 MPa (370 bar)
Pump capacity open-close (attachment)	50 l/min
Operating pressure connect-disconnect	15 MPa (150 bar)
Pump capacity connect-disconnect	5 l/min

Technical drawings

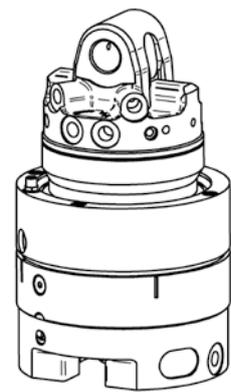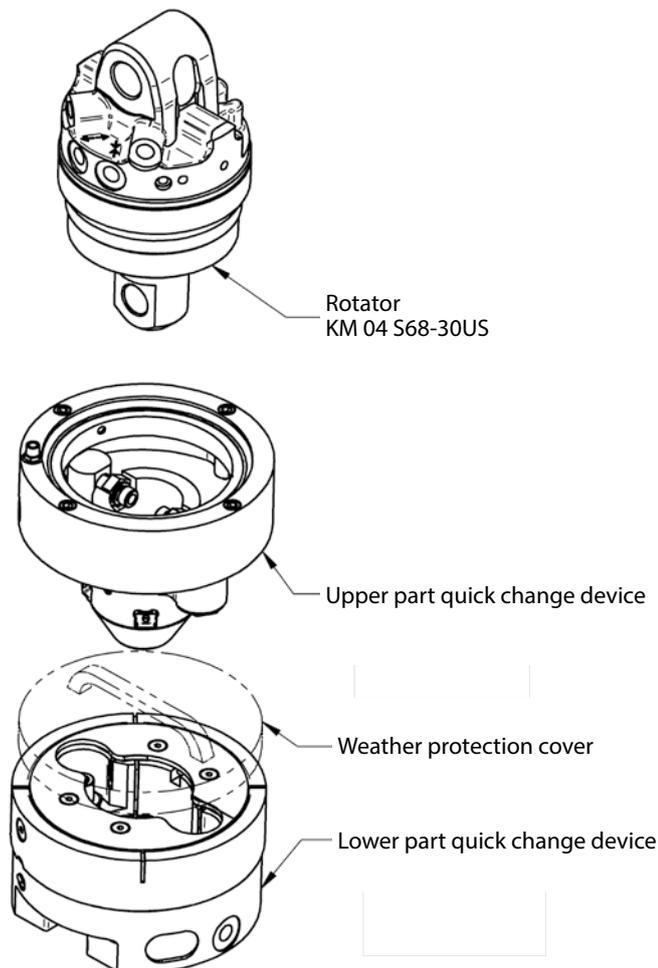

KM 506 03 HD non-rotating load hook

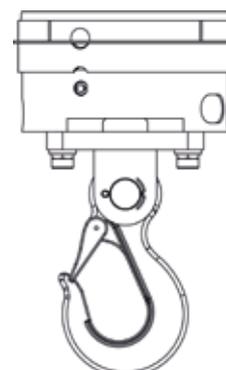

supporting rack available